


# FTPC-C (IP20)



## ● Features

- built-in active PFC function (FTPC30Vxx-C, FTPC50Vxx-C, FTPC75Vxx-C)
- wide range of models
- voltage versions: 12V
- cooling by free air convection
- compliance to worldwide safety regulations for lighting
- isolation class II
- wide operating temperature range (-20°C ~ +45°C)
- approved for installation directly on wood
- up to 5 years warranty

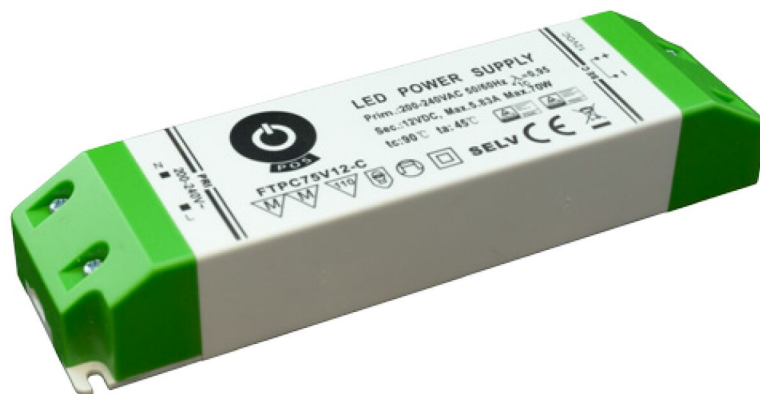

Model	Power	Voltage	Current	Protection	Safety & EMC	Working temperature	Dimensions (L×W×H)
FTPC8V12-C	8 W	12 V	0,67 A	Short circuit Over current Cooling by free air convection	EN 55015, EN 61347-2-13, EN61000-3-2 Class C	-20°C ~ +45°C	67 x 33 x 20mm (L x W x H)
FTPC20V12-C	20 W	12 V	1,67 A				103 x 35.5 x 16.5mm (L x W x H)
FTPC30V12-C	30 W	12 V	2,5 A				156 x 50 x 17mm (L x W x H)
FTPC50V12-C	50 W	12 V	4,2 A				160 x 50 x 18mm (L x W x H)
FTPC75V12-C	75 W	12 V	5,83 A				170 x 44.5 x 28.5mm (L x W x H)

